


# Automatic setting models

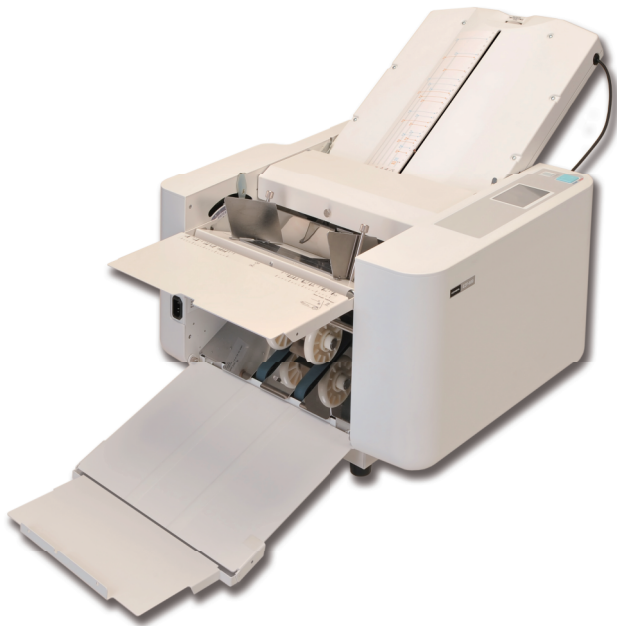

## EZF-600

**Fully automatic, utmost user-friendly model.**

- All the setting and operation can be done via the touch screen.
- Features paper feed pressure & separator pressure adjustment.
- Automatic feed table elevation and delivery roller setting.
- An optional device allows the EZF-600 to perforate, score and slit papers instead of folding.
- The most productive, reliable and user-friendly paper folder at its class.



Paper feed pressure adjustment helps the machine to feed wider range of stocks.



Separator pressure adjustment prevents double feeds.

## Specifications of EZF series

Model	EZF-600	EZF-500	EZF-200	EZF-100
Folding position setting	Automatic	Automatic	Manual	Manual
Max. Paper size	300 x 432mm			
Min. Paper size	91 x 128mm (Single fold only)			
Speed sheets/hr. (A4 Single fold)	1,800 - 14,400		Standard mode: 2,400/6,000/10,800 Noise reduction mode: 3,600 Thick paper mode: 3,600 Quick mode: 14,400	
Paper Quality	46.5 - 160gsm (Single fold : up to 230gsm) *Depending on paper type		46.5 - 140gsm (Single fold : up to 210gsm) *Depending on paper type	
Paper stacking capacity	500 sheets (64 gsm)			
Operation	Color touch screen (Addition/Subtraction)		Buttons + 4 digit counter (Addition/Subtraction)	
Folding pattern	6 kinds (Single, letter, zigzag, double parallel, fold-out, gate)			
Double feed detection	.	.	-	-
Fold pattern memory	36 kinds	36 kinds	-	-
Fine adjustment memory	36 kinds	36 kinds	-	-
Odd-size paper folding pattern memory	24 kinds	12 kinds	-	-
Cross fold	.	.	.	Optional
Paper jam detection	.	.	.	.
Error map	.	.	.	.
Paper feed/separator pressure adjustment	.	-	-	-
Feed table elevation	.	-	-	-
Paper ejection	Belt	Belt	Belt	Natural
Ejection roller setting	Automatic	Manual	Manual	-
Quick release rollers	.	.	.	-
Options	Perforation, scoring, slitter		-	Paper guide for cross folding
Dimensions (W x D x H mm)	1,030x545x500	1,030x545x500	1,010x545x500	800x545x500
Net Weight	30.6kg	29.6kg	26.8kg	25.2kg
Power Consumption	50W (100-240VAC, 50/60Hz)			

\*Production rates are based on optimal operating conditions and may vary depending on stock and environmental conditions.

\*As part of our continuous product improvement program, specifications are subject to change without notice.

## NEOSYS VIETLOI COMPANY LIMITED

Showroom: No.26B, Street 10, Thao Dien Ward, Dist.2, HCMC, Vietnam  
 HN Branch: 3rd Floor, No.6, Lane 2, Quan Nguu St., Ba Dinh Dist., Hanoi, Vietnam  
 Tel: (+8428) 22532772/ 25532773 - Fax: (+8428) 22532771  
 Website: www.neosys-vietloi.com.vn  
 Email: info@neosys-vietloi.com.vn  
**Hotline: 0902 886 117**

