
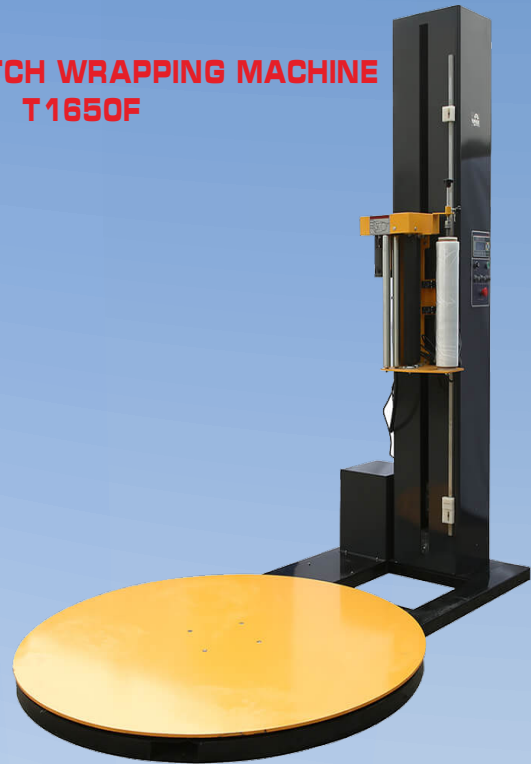


PALLET STRETCH WRAPPING MACHINE T1650F

- * PLC control
- * Adjustable speed
- * wrapping layers can be set
- * Important electric appliances
- * Photoelectric switch detection of cargo height
- * U-type guide rail construction
- * 6 nylon rubber coating carrier roller

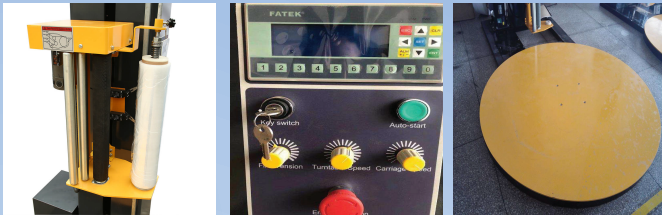

T1650F Stretch Wrapping machine are used to wrap stretch film around a loaded pallet. Film provides extra support while the products being transported and store to protect them from tip,spill or form being damaged.Additionally,wrapped loads can easily be separated and identified.

Model	T1650F
Max.Wrapping Height	2,4 m
Upright height	2,8 m
Turntable Diameter	1650 mm
Turntable loading	2000 kg
Turntable speed	0-12 bpm/min
Film frame up&down speed	0-90 mm/s
Turntable height	90 mm
Packing efficiency	20-40 packs / hour
Packing size	L2850 * W1700 * H980 mm
Packing material LLDPE stretch film	(T:30um, W:500mm, ID:76mm, OD: 250mm, about 1250m length)
Power supply	110V-220V/50-60Hz 1Phase , 1.55 kW
Gross weight	650 kg
Machine size	L2545 * W1650 * H980 mm